
CAE PERFORMANCE PRODUCTS PTY/LTD

Pyrenees Hwy Chewton, VIC. 3450

Telephone : (03) 5472 1442 - Fax (03) 5472 4111

WIPER KIT COMPONENT LIST

Wiper Motor and Mounting Bracket Assembly

Motor Crank Link

Owner must supply us with the original Wiper motor Assembly with crank

Wiring Loom, Switch and In Line Fuse

Customer Instructions

Fitting Instructions

Camaro Wiper Installation Instructions


Thank you for purchasing our Conversion Kit, instructions for fitment are as follows.

- 1 Fit 2 Speed motor mount on firewall utilizing the three original mounting Plate holes. You can rotate the wiper motor to where you want it to be located on the mounting Bracket, by undoing the three Wiper Motor mounting bolts and selecting the best positions. On some applications it may be necessary to drill 3 new holes to give you a better location to miss some extra equipment on the engine.
- 2 Click on the vehicle Arm that fits over the crank Ball.
- 3 Fit 2 speed switch in appropriate hole and install wiring loom supplied.
- 4 Connect Red feed wire through Fuse supplied to suitable Ignition Feed Wire on Ignition Switch of vehicle.
- 5 Connect the Brown wire to suitable earth location on the vehicle.
- 6 Activate power and check wiper for under dash clearance. Eg. Speaker wires, wiring, demister ducts, brake/clutch pedal assembly, bracing.
- 7 Self park the motor with switch and fit the windscreen Arms and Blades in the park position. Double check for rotation Clearances. If the Park position needs adjustment, this is done by removing the Motor from its bracket (3 bolts) and with a ¼ drive & extension socket, undo the motor crank and rotate this to the position required on the splined motor shaft. Tighten the shaft nut again use a 13mm socket or ring spanner. Re-assemble and check self park position. (Note the motor is set at the self park position at the factory and it is rare you will need to make any adjustments to the Park Position)

CAE PERFORMANCE PRODUCTS PTY/LTD


Pyrenees Hwy Chewton, VIC. 3450
 Telephone : (03) 5472 1442 - Fax (03) 5472 4111

WIPER MOTOR LOOM PINOUTS



- 1) White - Park
- 2) Blue - Low Speed
- 3) Black - Earth
- 4) Red - 12V Feed
- 5) Green - High Speed
- 6) Blank

6 Pin Female Loom Plug
As Viewed from the front

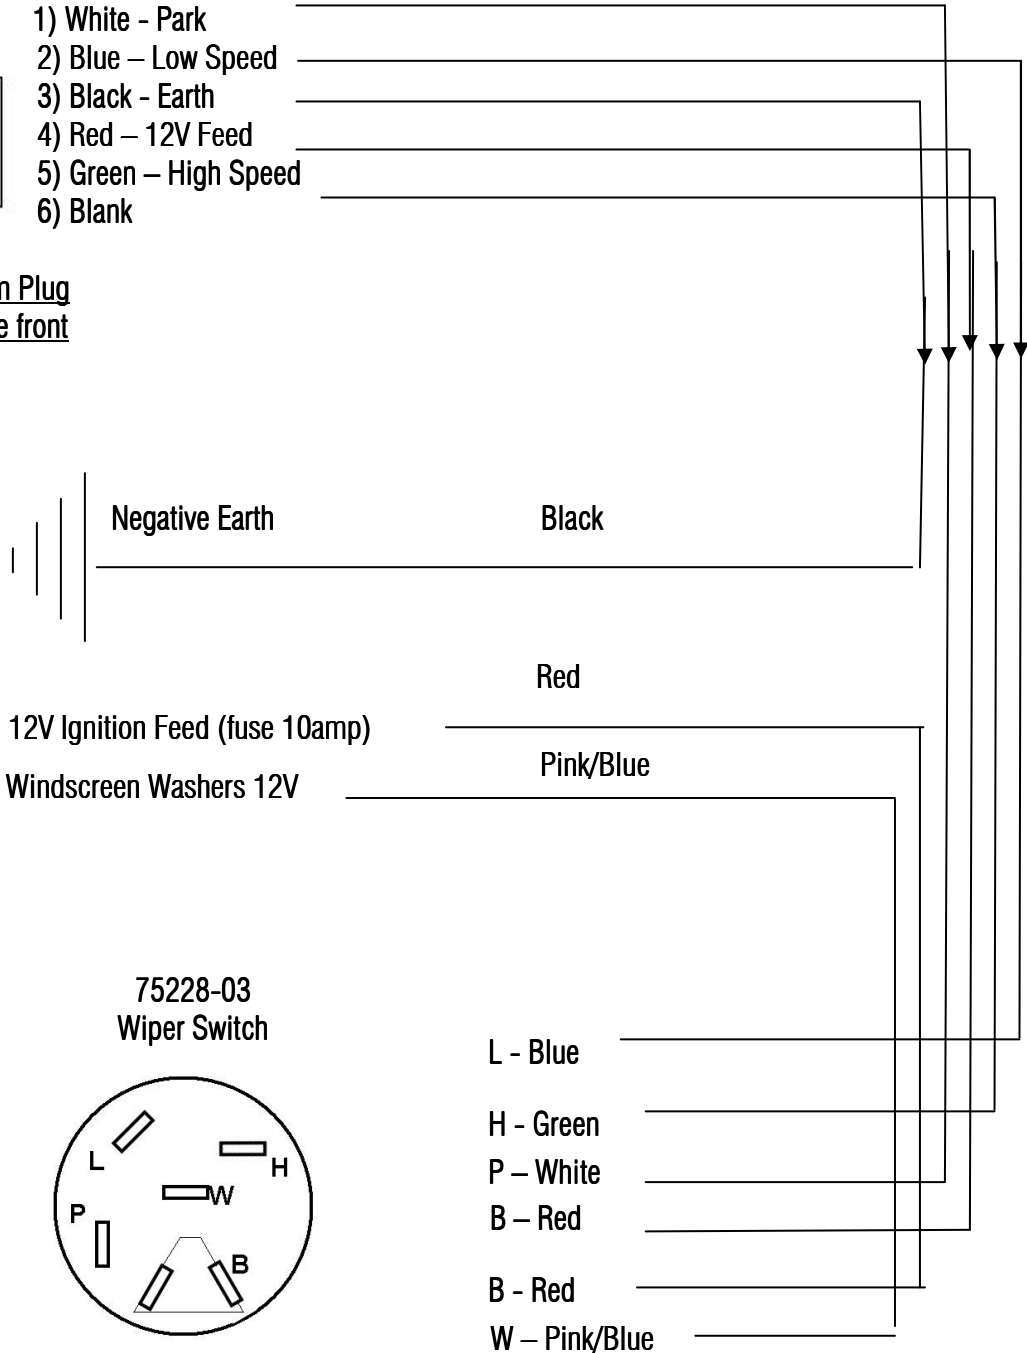

Wiper switch system is 12V Positive Feed