

## **CAE PERFORMANCE PRODUCTS**

A.B.N. 37 340 926 183

7 MAIN ROAD, CASTLEMAINE, VIC.3450.

TELEPHONE: (03) 54721442 - FAX: (03) 54724111

Email: [info@caenterprises.com.au](mailto:info@caenterprises.com.au) Website: [www.caenterprises.com.au](http://www.caenterprises.com.au)

### **Wiper Kit Components List.**

Wiper Motor and Mounting Bracket Assembly

Wiper Link and Pin Assembly

Wiring Loom, Switch and In Line Fuse

Customer Fitting Instructions.

### **XW & XY & XT Falcon Wiper Kits Fitting Instructions.**

#### **(1) Fit new wiper motor assy. -----**


Place connecting arm on motor shaft and temporarily mount motor assy. Wire in switch and connecting Red wire thru fuse supplied to a suitable Ignition feed connection on the vehicle ignition switch. The Brown wire is to be connected to a suitable earth connection on the vehicle body

- (2) Remove wiper arm and blades from windscreen. Test W/Motor using new switch and turn off.
- (3) Check Centre Link has come to the Park position
- (4) If Step (3) is OK, reposition the Arm and Blades to the correct parking position. Wet windscreen and retest. If the park position has to be adjusted, use a 11mm spanner to undo the wiper shaft nut,-- tap off the crank assembly and rotate the crank manually to the park position required, refit crank to shaft and tighten nut firmly with the 11mm spanner Retest and recheck park position.

# CAE PERFORMANCE PRODUCTS PTY/LTD


## Wiper Motor Pin Outs.

Plugs viewed from the front not the wiring side  
**WIPER MOTOR LOOM PINOUTS**



- 1) White - Park
- 2) Blue - Low Speed
- 3) Black - Earth
- 4) Red - 12V Feed
- 5) Green - High Speed
- 6) Blank

6 Pin Female Loom Plug  
As Viewed from the front

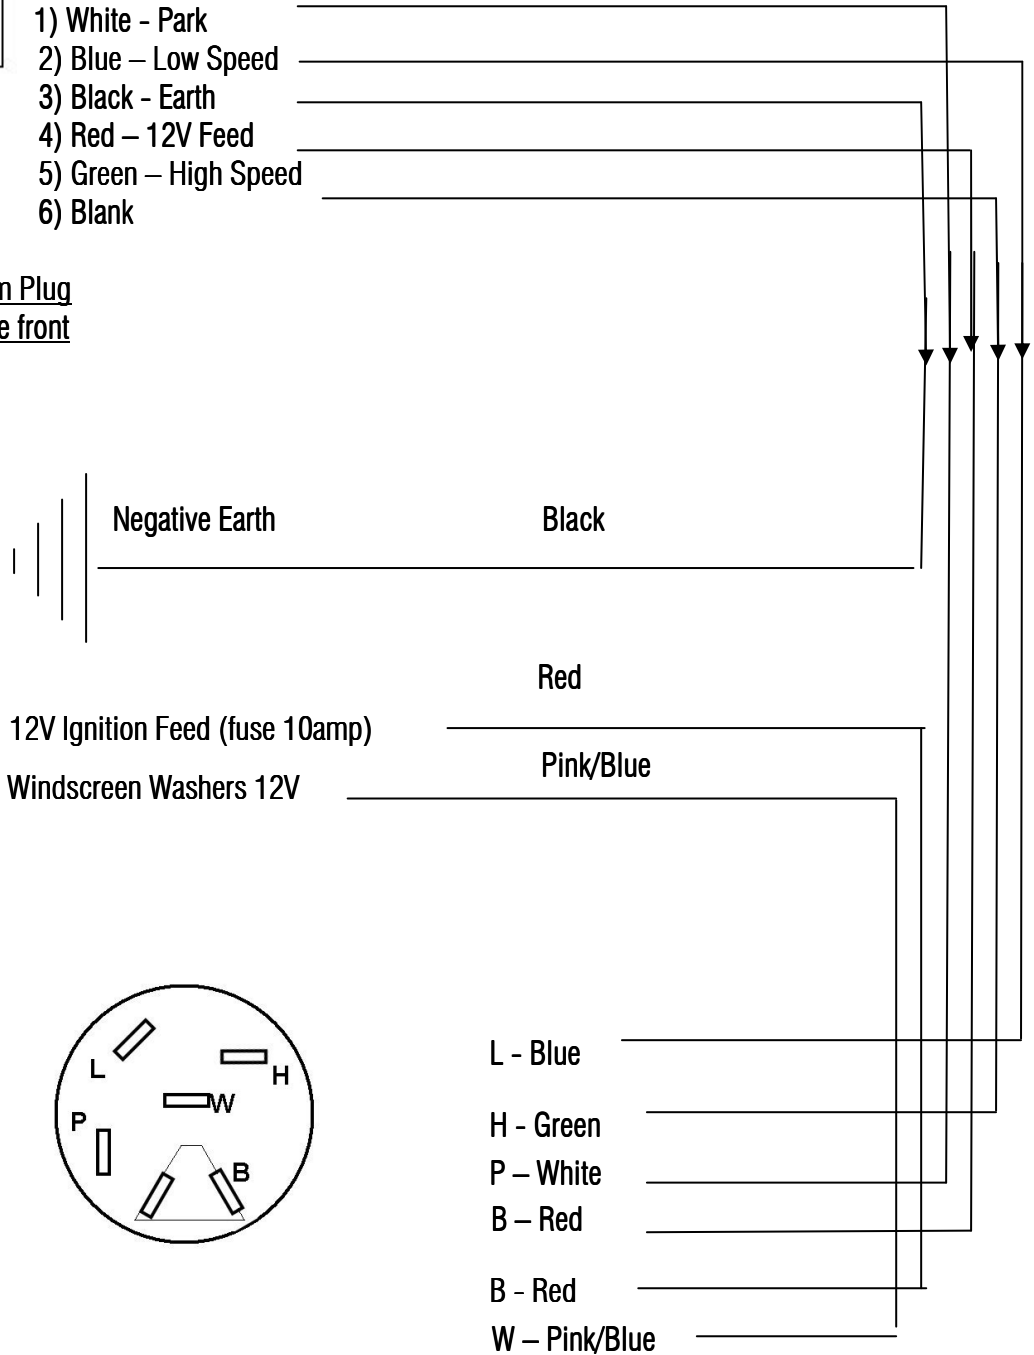

Wiper switch system is 12V Positive Feed