

CAE PERFORMANCE PRODUCTS


7 Main Road Castlemaine, VIC. 3450

T 03 5472 1442

F 5472 4111

W www.caepformanceproducts.com.au

E info@caenterprises.com.au



WM-HOLDEN HK-HG

Wiper Kit Component List

Wiper Motor Assembly
Wiring Loom, Switch and In Line Fuse.
Customer Instruction Sheet


Fitting Instructions

HG HK HT Holden 2 Speed Wiper Motc

- 1 Remove original motor assembly.
- 2 Fit new 2 Speed motor (It may be necessary to run a drill new holes to suit the mounting bolts) If necessary, trim back the firewall insulation to give wiper crank rotation clearance.
- 3 Fit 2-speed switch in appropriate hole and install wiring loom supplied.
- 4 Connect Brown wire to suitable earth location on the vehicle
- 5 Connect Red feed wire through Fuse supplied to suitable Ignition Feed Wire on Ignition Switch of vehicle. Activate the wiper motor and switch to the park position. (This will preset the self-park position of the wiper crankshaft ready for wiper link connections.)
- 6 Fit original arm to wiper to wiper crank and clip securely
- 7 Activate power and check wiper for dash and body clearance.
- 8 Activate motor and self-park motor with switch and fit and adjust the wiper blades in the park position on the windscreen. Check windscreen sweep and adjust blades if necessary.


CAE PERFORMANCE PRODUCTS

7 Main Road Castlemaine, VIC. 3450
 T 03 5472 1442
 F 5472 4111
 W www.caepformanceproducts.com.au
 E info@caenterprises.com.au




WM-HOLDEN HK-HG

WIPER MOTOR LOOM PINOUTS



- 1) White - Park
- 2) Blue - Low Speed
- 3) Black - Earth
- 4) Red - 12V Feed
- 5) Green - High Speed
- 6) Blank

6 Pin Female Loom Plug
As Viewed from the front

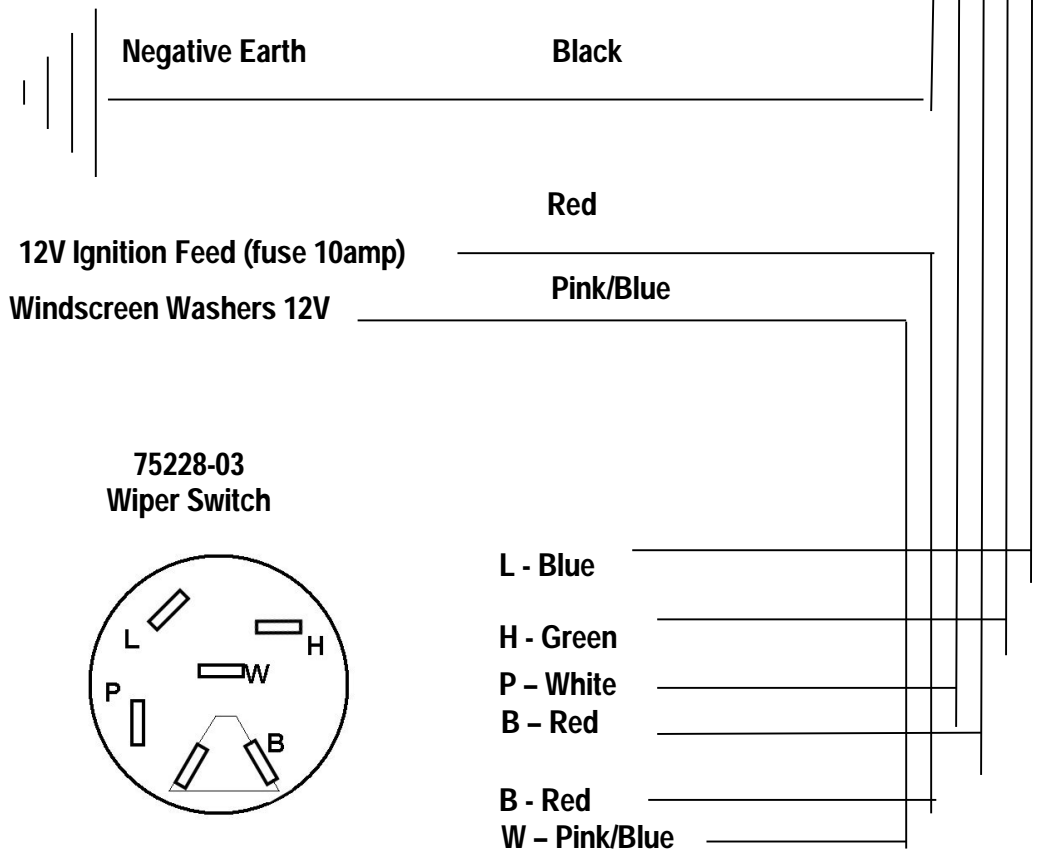

Wiper switch system is 12V Positive Feed